



Hand Operated Curtain Track Systems

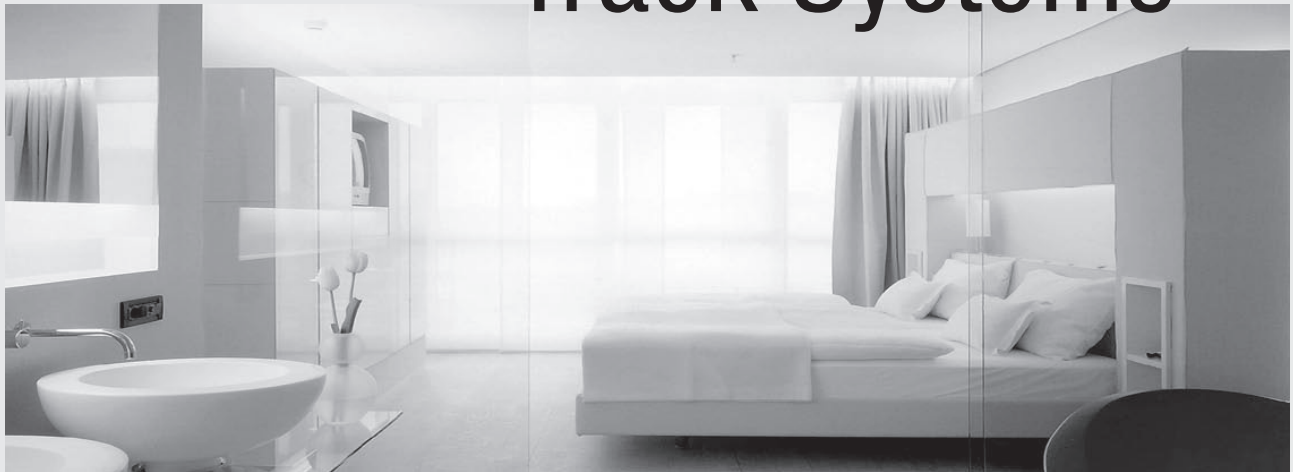

Hand Operated Curtain Track System

Silent Gliss® 1012

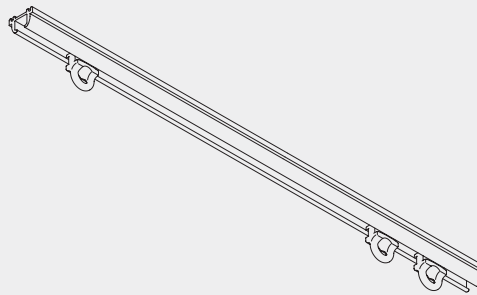


Product Information

- Hand operated curtain track for light curtains and nets.
- Especially suitable for trucks, boats, caravans, etc..
- Thin, elegant and bendable ceiling fix profile with special concrete-fixing supports where appropriate.
- Quick fixing to wood with special Silent Gliss 7550 centre tool.
- Pre-drilled every 120mm.
- Standard colours: silver and bronze.
- Standard profile length 6m, (profile connector for longer lengths).
- Can be bent.



1012

Profile, Bending and Specification Information



1012



Can be bent.
Standard radius R
1012 = 100mm
Also as arch.

This is the standard radius which we recommend for optimal operation. The minimum possible radius is 60mm.

Specification guide - download from www.silentgliss.co.uk (password required).

Silent Gliss 1012 curtain track, hand-drawn, anodised aluminium, complete with gliders 3533 at 16/m. 2 endstops 3016 per length, top fixed to timber (by others) at 360mm. centres with special screw 3019.Lm. State colour.

Fitting Information

Fixing points




The fixing distances are meant as a guide only: they may vary in practice depending on surface and curtain weight.

Silent Gliss Tools 7550 makes fitting to wood more efficient and eliminates damage to the track.




1012



A: Centre tool 7550
B: Screw 3019 / 12mm
C: Screw 3025 / 18mm


Fitting Options

Ceiling fix to timber with single profile





The final distances may be outside of the recommendations above depending on curtain heading, make-up and any obstructions. Batten thickness depends on length of screw.

Ceiling fix to timber with two or multiple profiles



The final distances may be outside of the recommendations above depending on curtain heading, make-up and any obstructions. Batten thickness depends on length of screw.

Fixing to concrete ceilings with support 3112



The final distances may be outside of the recommendations above depending on curtain heading, make-up and any obstructions. Batten thickness depends on length of screw.

Standard Accessories

1012	Profile		3016	Endstop		
3019	Special screw - 12mm (standard for timber)		3112	Concrete fixing support (std for concrete)		
3534	Glider 3533 in strip form		7002	Profile protector		1012

Optional Accessories

3025	Special screw (18mm)		3032	Spring stop	
3064	Connecting bridge		3070	Twist eye endstop	
3071	Screw twist endstop		3511	Glider	
3533	Glider		3548	Retrofit glider	
3570	Rotating glider				

Useful Information and Sewing Accessories




Diagram uses standard 3533/3534 glider and is measured to the inside of the glider eye. For optional gliders substitute dimensions below:

3570 = 6.0mm

3548 = 6.5mm

3068 Loop tape



3562 Standard tape



3571 Hook



3582 Hook




3599 Hook



Useful Measurements

3064 Connecting bridge



1012

www.bradingfabrication.com

Brading Fabrication Limited
3204 Yonge Street
Toronto, ON, Canada
M4N 2L2

Tel: 416-488-6600
Fax: 416-488-9821
info@bradingfabrication.com