


Sliding Panel Systems



Chain Operated Sliding Panel System

Silent Gliss® 2600 Panel Fold

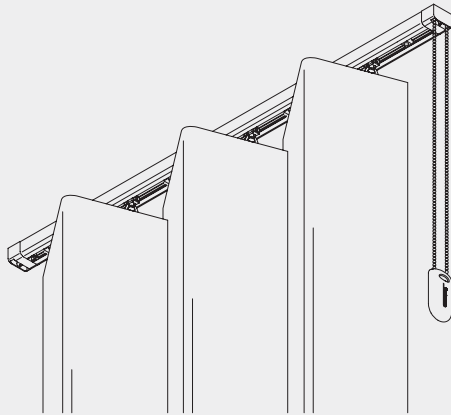


Product Information

- Unique sliding panel system that allows folding of panels.
- Stunning effects through the 3-D shape.
- Mono-control bead chain operation.
- Folding and unfolding as well as open and close in one action.
- One system can carry up to 8 panels.
- Depending on the total system width, panels can be selected in three different size ranges.
- Cannot be bent.
- Standard profile colour white.
- Easy removal of fabrics for cleaning thanks to easy click-in hangers and Velcro tape.
- Ceiling fix recommended.
- Symmetrical and asymmetrical stacking possible.
- Recommended range of fabrics available.
- Supplied made to measure.



2600


Profile, Bending and Specification Information



2601




Recess profile for suspended ceilings



2614



Recess profile




2615



Specification Guide - download from www.silentgliss.co.uk (password required).

Silent Gliss 2600 mono control Panel Fold system comprising extruded aluminium headrail 2601 finish powder coated white. System complete and assembled with fabric panels, carriers 2510, bottom weight 2006 and all the necessary fittings to provide a fully working panel fold system.m o/s drop, arranged to stack right hand single/left hand single/pair/asymmetric stack. Fabric Top fix with bracket 2616/recess fix with profile 2615. Detail specification to be agreed between architect/interior designer/contractor and Silent Gliss Ltd.

How to Measure

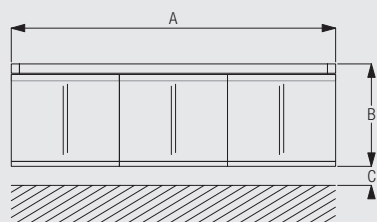

- A: System width
- B: System drop
- C: 15mm recommended clearance
- B + C = Floor to ceiling height

2600

Stack size calculation


Panel Width in cm	Number of Panels				
	1	2	3	4	5
40 - 43	19	24	29	34	39
44 - 46	20	25	30	35	40
47 - 50	21	26	31	36	41
51 - 55	22	27	32	37	42
56 - 58	23	28	33	38	43
59 - 63	24	29	34	39	44
64 - 66	25	30	35	40	45
67 - 71	26	31	36	41	46
71 - 72	27	32	37	42	47

- A: Stack gap
- B: Stack width
- A+B: Total stack size

Due to the unfolding of the panels, when opened, the first stack at either end is at some distance from the end of the profile, depending on the panel width. When closed, the complete width of the system is covered.


On the left hand chart you can calculate the total stack size and its distance from the profile end, based on the panel width and the number of panels.

Operation / Panel Movements

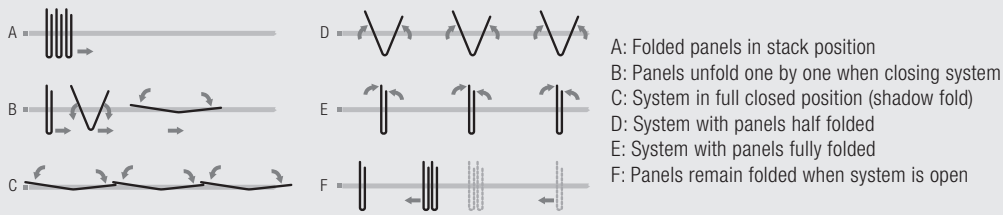

Fitting Information

Click-in Bracket

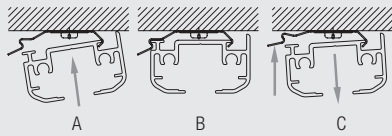


A: Hook in profile at the front
 B: Push profile upwards until it clicks in
 C: Push lever for removal.


Fitting Options

CAD download through Silent Gliss Extranet

Ceiling fix with bracket 2616




Panel (cm)	X (cm)
40-45	18
46-50	19
51-55	21
56-60	22
61-65	23
66-72	25





The minimum distance from the wall (X) depends on the panel width (see table above)

Recess fix with recess profile 2615




Panel (cm)	X (cm)
40-45	18
46-50	19
51-55	21
56-60	22
61-65	23
66-72	25





The minimum distance from the wall (X) depends on the panel width (see table above). The profile 2615 cannot be bent.

Recess fix in suspended ceiling with recess profile 2614 and hanger 6268



Panel (cm)	X (cm)
40-45	18
46-50	19
51-55	21
56-60	22
61-65	23
66-72	25



The minimum distance from the wall (X) depends on the panel width (see table above). The profile 2615 cannot be bent.

Standard Accessories

0998 Safety Cord Retainer




2006 Weight bar



2510 Profile



2601 Profile




2604 Guide



2616 Bracket



2629 Pilot runner for single stack



2641 Holder



2865 Bead chain connector



2866 Operating chain




3340 Cord/Chain weight (not for use with 4845 metal bead chain)




2600

Optional Accessories

2614 Profile



2615 Profile



3799 Cord Tidy



5118 Wedge for recess profile



6268 Hanger




Fabric Information


Silent Gliss supply the panel fold system fully assembled complete with fabric panels chosen from a recommended fabric range.

Useful Measurements


2006 Weight bar



2510 Profile



2604 Guide



2600

www.bradingfabrication.com

Brading Fabrication Limited
3204 Yonge Street
Toronto, ON, Canada
M4N 2L2

Tel: 416-488-6600
Fax: 416-488-9821
info@bradingfabrication.com