


Soft Shade Systems



Cord Operated Soft Shade System

Silent Gliss® 2100

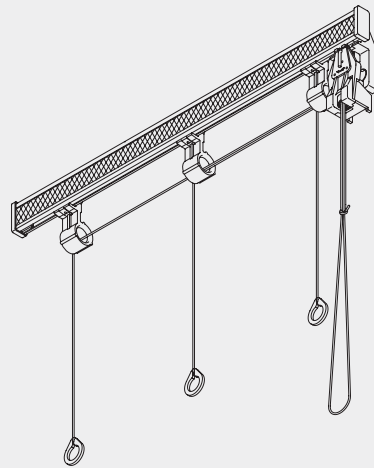



Product Information

- Cord operated Soft Shade system for residential and contract applications. Suitable for light to medium weight shades.
- Various profiles and components offer an almost unlimited choice of variations and options.
- Left or right hand operation for all options.
- The maximum width is 8' and the maximum height can go up to 13'. All dimensions depend on total shade weight including bottom weight bar.
- The weight of the shade including the bottom weight bar should never exceed 4 1/2 lbs, depending on the components used.
- The top stack of the fabric takes up about 10-20% of the shade drop (depending on fabric make-up).
- The Silent Gliss 2100 can be mounted on either the ceiling or a wall.



2100

Profile and Bending Information

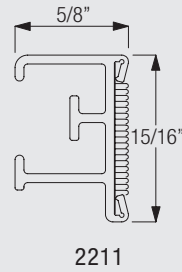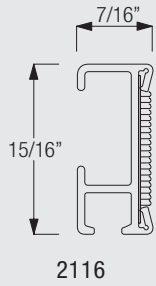

There are two profiles / headrails available for system 2100.

System Dimensions



8 ft



13 ft




7 lbs

System maximum Dimensions

The system dimensions of system 2100 depend on the selected components. Please refer to "System Options" for further details.

System Options / System Components


System with cleat 2104 and eyelet 2101

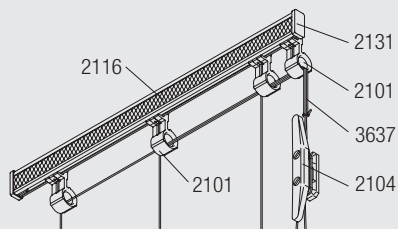

2116 profile (or 2211)
2131 endcover (or 2179)
2104 cleat
2101 eyelet
3637 cord

For light weight applications (max. 4 1/2 lbs)

System with cord lock 2068 and eyelet 2101

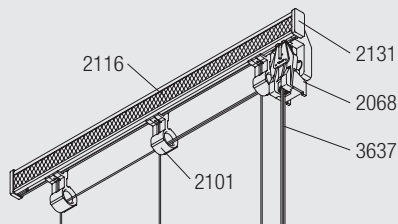

2116 profile (or 2211)
2131 endcover (or 2179)
2068 cord lock
2101 eyelet
3637 cord

For light weight applications (max. 4 1/2 lbs)


Mounting and Sewing Information

Bracket Positioning




The effective measurements are defined by the actual height and width of the curtain, spool positioning, its structure and make-up type.


Mounting of cords



A: 3074 Loop tape / 2164 Ring tape
 B: Cord 3637
 C: Hook 3055
 D: Ring 2093
 E: Hollow hem
 F: Bottom weight bar 2004 / 2016



A: 3074 Loop tape / 2164 Ring tape
 B: Cord 3637
 C: Ring 2093
 D: Hollow hem
 E: Bottom weight bar 2004 / 2016





A: 3074 Loop tape / 2164 Ring tape
 B: Cord 3637
 C: Ring 2109
 D: Hollow hem
 E: Bottom weight bar 2004 / 2016





2100

Mounting Options


Ceiling mounting with bracket 3603 (Profile 2116)






Ceiling mounting with bracket 3603 (Profile 2211)



Wall mounting with brackets 3630, 3655 and 3660 (Profile 2116)




| | X (in) |
|------|--------|
| 3630 | 1 3/4 |
| 3655 | 2 5/16 |
| 3660 | 2 7/8 |






2100






Wall mounting with brackets 3630, 3655 and 3660 (Profile 2211)



| | X (in) |
|------|--------|
| 3630 | 1 7/16 |
| 3655 | 2 |
| 3660 | 2 9/16 |




Wall mounting with adjustable brackets 0829, 0831 with slider 0828 and clamp 3603 (Profile 2116)



Brackets feature thread for screw M4x8 for fixing the bracket 3603





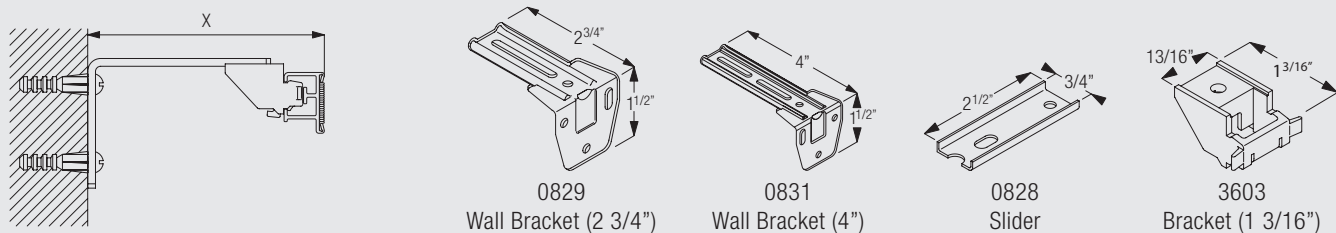


Wall mounting with adjustable brackets 0829, 0831 with slider 0828 and clamp 3603 (Profile 2211)



Brackets feature thread for screw M4x8 for fixing the bracket 3603

Standard Accessories





Single Parts




| | | | | | |
|------|-------------------|---|------|----------------|---|
| 2004 | Weight bar |  | 2068 | Cord lock |  |
| 2093 | Ring |  | 2101 | Eyelet |  |
| 2104 | Cleat |  | 2116 | Profile |  |
| 2131 | Endcover (1") |  | 2132 | Cord Connector |  |
| 2147 | Cord lock |  | 2179 | Endcover (1") |  |
| 2265 | Cord lock |  | 2539 | Velcro Tape |  |
| 3055 | Hook |  | 3090 | Cord (ø 3/16") |  |
| 3603 | Bracket (1 3/16") |  | 3630 | Bracket (1.4") |  |
| 3637 | Cord (ø 1/16") |  | | | |



2100

Optional Accessories



Single Parts


| | | | | | |
|------|-----------------------|---|------|-------------------|---|
| 0829 | Wall Bracket (2 3/4") |  | 0831 | Wall Bracket (4") |  |
| 2179 | Endcover (1") |  | 2211 | Profile |  |

| | | |
|------|-------------------|---|
| 3055 | Hook |  |
| 3340 | Cord/Chain weight |  |
| 3660 | Bracket (2.4") |  |


| | | |
|------|----------------|---|
| 3090 | Cord (ø 3/16") |  |
| 3655 | Bracket (2") |  |


Sewing Accessories


| | | |
|------|-------------|---|
| 2093 | Ring |  |
| 2539 | Velcro Tape |  |


| | | |
|------|--------|---|
| 2215 | Eyelet |  |
|------|--------|---|


Useful Measures

| | | |
|------|------------|--|
| 2004 | Weight bar |  |
|------|------------|--|

| | | |
|------|-----------|--|
| 2068 | Cord lock |  |
|------|-----------|--|

| | | |
|------|--------|---|
| 2101 | Eyelet |  |
|------|--------|---|

| | | |
|------|----------|---|
| 2131 | Endcover |  |
|------|----------|---|

| | | |
|------|----------|---|
| 2179 | Endcover |  |
|------|----------|---|



www.silentgliss-usa.com

Silent Gliss USA Inc.
1850 Beaver Ridge Circle, Suite A
Norcross GA 30071

Phone: 770-466-4811
Toll Free: 1-800-938-7225
Fax: 770-466-4814
info@silentgliss-usa.com

www.brading.com

Brading Specialty Shades
3204 Yonge Street
Toronto, ON M4N 2L2

Phone: 416-488-6600
Toll Free: 1-866-BRADING
Fax: 416-488-9821
info@brading.com